

FLANGED SADDLE FOR PE/PVC PIPES series BPF



TAPPING SADDLES



APPLICATION


BLUCAST flanged saddles for PE/PVC are easy to mount, maintenance free and designed for long life.

TECHNICAL CHARACTERISTICS

Flange end connections according to EN1092-2: PN10&PN16
Maximum working pressure: PN16 / 16 bar
Working temperature: 0°C - +80°C
Stainless steel bolts
Color RAL5015
Powder epoxy coating at least 250 µm thickness

DE	DN	L	H	D	PN	Weight	BLUCAST ref. no.
90	50	180	145	165	PN10/16	6	BPF090050
110	50	200	160	165	PN10/16	6.9	BPF110050
110	65	200	160	185	PN10/16	8.5	BPF110065
110	80	200	160	200	PN10/16	8.4	BPF110080
125	100	200	180	220	PN10/16	11.5	BPF125100
140	100	230	180	220	PN10/16	12	BPF140100
160	50	230	170	165	PN10/16	11	BPF160050
160	80	230	190	200	PN10/16	15.9	BPF160080
160	100	230	200	220	PN10/16	14	BPF160100
200	50	230	215	165	PN10/16	16.3	BPF200050
200	80	230	225	200	PN10/16	16	BPF200080
200	100	230	230	220	PN10/16	16	BPF200100
200	150	230	230	285	PN10/16	19	BPF200150
225	50	230	230	165	PN10/16	16	BPF225050
225	80	230	230	200	PN10/16	16	BPF225080
225	100	230	230	220	PN10/16	17	BPF225100
225	150	230	235	285	PN10/16	19	BPF225150
250	50	300	230	165	PN10/16	19	BPF250050
250	80	300	240	200	PN10/16	20	BPF250080
250	100	300	250	220	PN10/16	21	BPF250100
250	150	300	250	285	PN10/16	24	BPF250150
315	50	300	300	165	PN10/16	22	BPF315050
315	80	300	305	200	PN10/16	27	BPF315080
315	100	300	310	220	PN10/16	23	BPF315100
315	150	300	320	285	PN10/16	31	BPF315150
400	80	300	365	200	PN10/16	50.2	BPF400080
400	100	300	365	220	PN10/16	52.2	BPF400100
400	150	300	365	285	PN10/16	54.2	BPF400150
500	100	325	405	220	PN10/16	60	BPF500100

No.	Item	Material
1	Body	Ductile iron EN-GJS-500-7
2	Gasket	EPDM
3	Bolts	AISI304 stainless steel

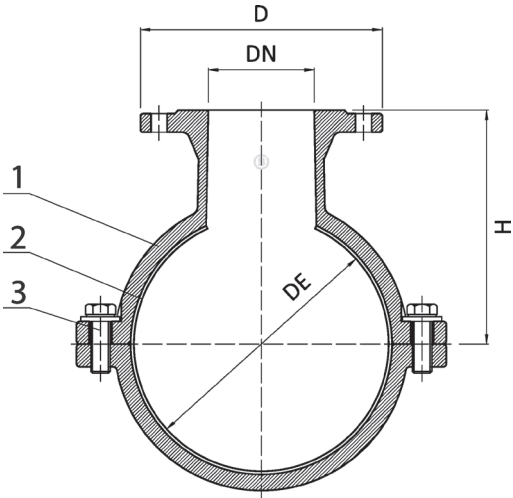

All illustrations, technical data, dimensions (in mm) and weights (all weights specified in kg) are non-binding and are subject to change

